

KOMSENS-6G

Enabling Sensing in 6G Networks

Berlin 6G Conference | Joint session ICAS4Mobility + KOMSENS-6G
July 1, 2024 | Berlin | - public -

Presented by Jörg Huschke on behalf of the KOMSENS-6G project


SPONSORED BY THE




Federal Ministry
of Education
and Research

Use Cases

- Public Safety
 - Unmanned Aerial Vehicles (UAV) monitoring
 - Railroad blocker detection
- Smart Logistics/Factory
 - Autonomous guided vehicles (AGVs) route planning
 - Scheduling of transport tasks on the shop floor
- Sensing aiding communications
 - Reduction of device-based measurement burden for maintenance of communication link
 - Beams, handovers, ...

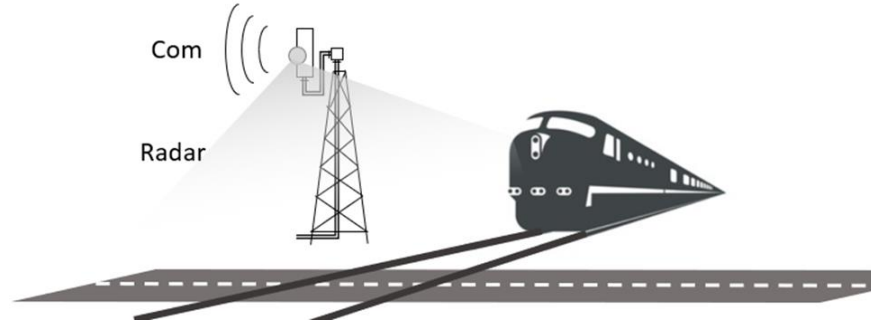

Logical System Architecture for ISaC

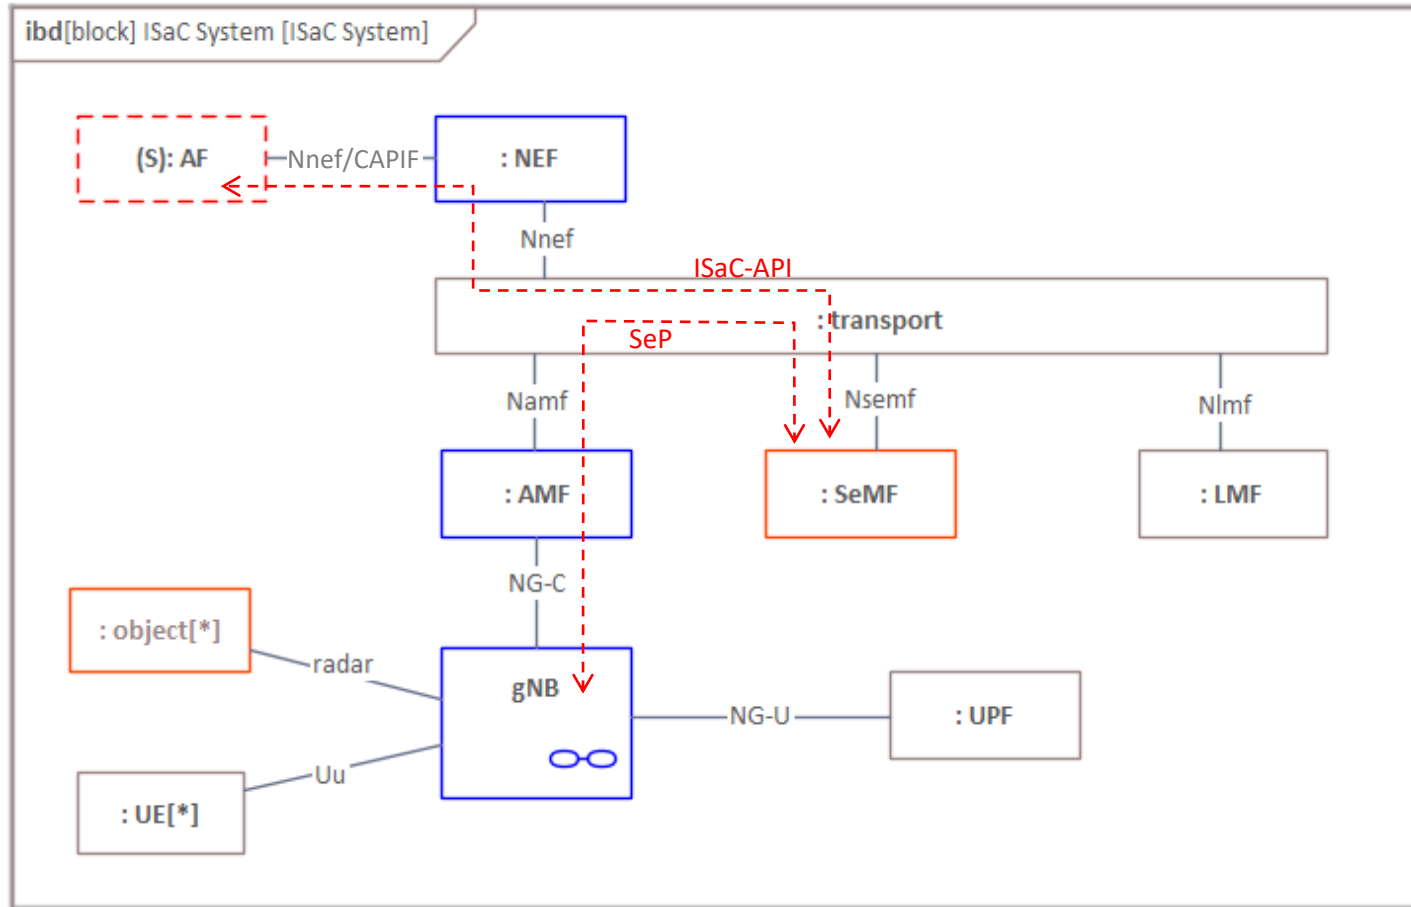


new New components for ISaC in red **mod** Modified components for ISaC in blue

- **3GPP Rel-18 architecture** was taken as **starting point** for the ISaC extension
- Besides the Logical System Architecture, **more details exist in KOMSENS-6G** (message sequence, message structure, gNB logic, ISaC-API, and more ...)
- **Security & Privacy concepts** (part of SeMF, in discussion) are integrated

SeMF	Sensing Management Function
NEF	Network Exposure Function
AMF	Access & Mobility Mgmt. Function
AF	Application Function
ISaC	Integrated Sensing and Communication
ISaC-API	ISaC Application Programming Interface
SeP	Sensing Protocol
LMF	Location Management Function
UPF	User Plane Function

Logical System Architecture for ISaC

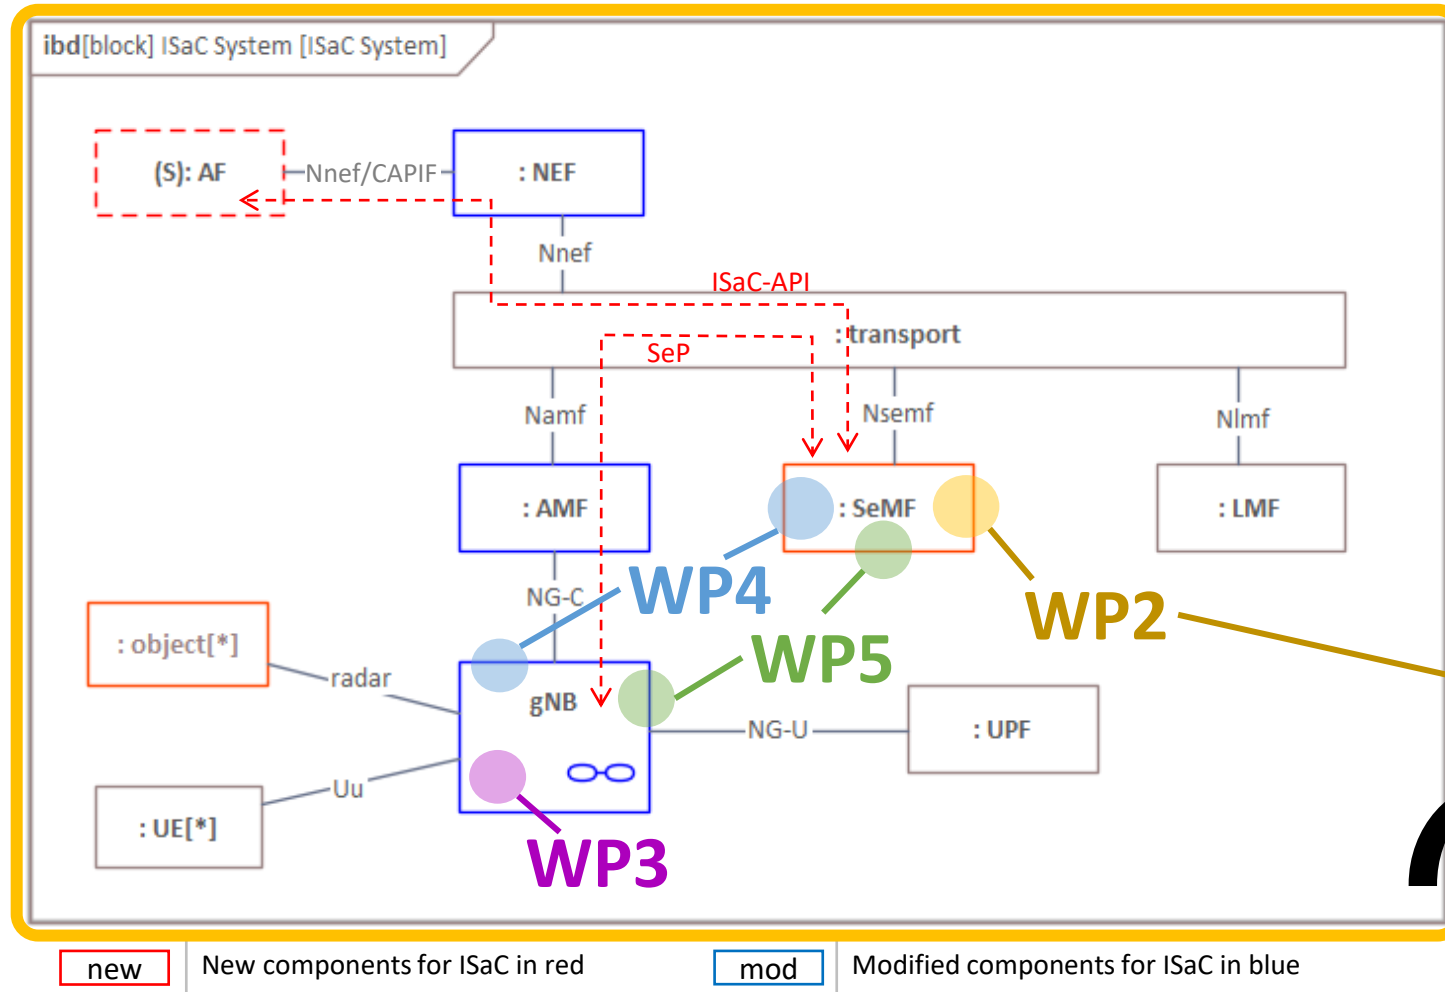


- **WP2: (Overall) Architecture**
- **WP3: Radio front-end & baseband**
- **WP4: Resource allocation, QoS, RAN protocols**
- **WP5: Knowledge inference**
- **WP6: Demonstrators**

WP6

SeMF Building Blocks

- ISaC API & SeP protocol handling
- Discovery and selection of TRPs for sensing
- Sensing Policy, Consent & Transparency Management
- Control of sensing measurement with selective modes
- Sensing data processing and optimization options
- Result storage and forwarding to ISaC-API

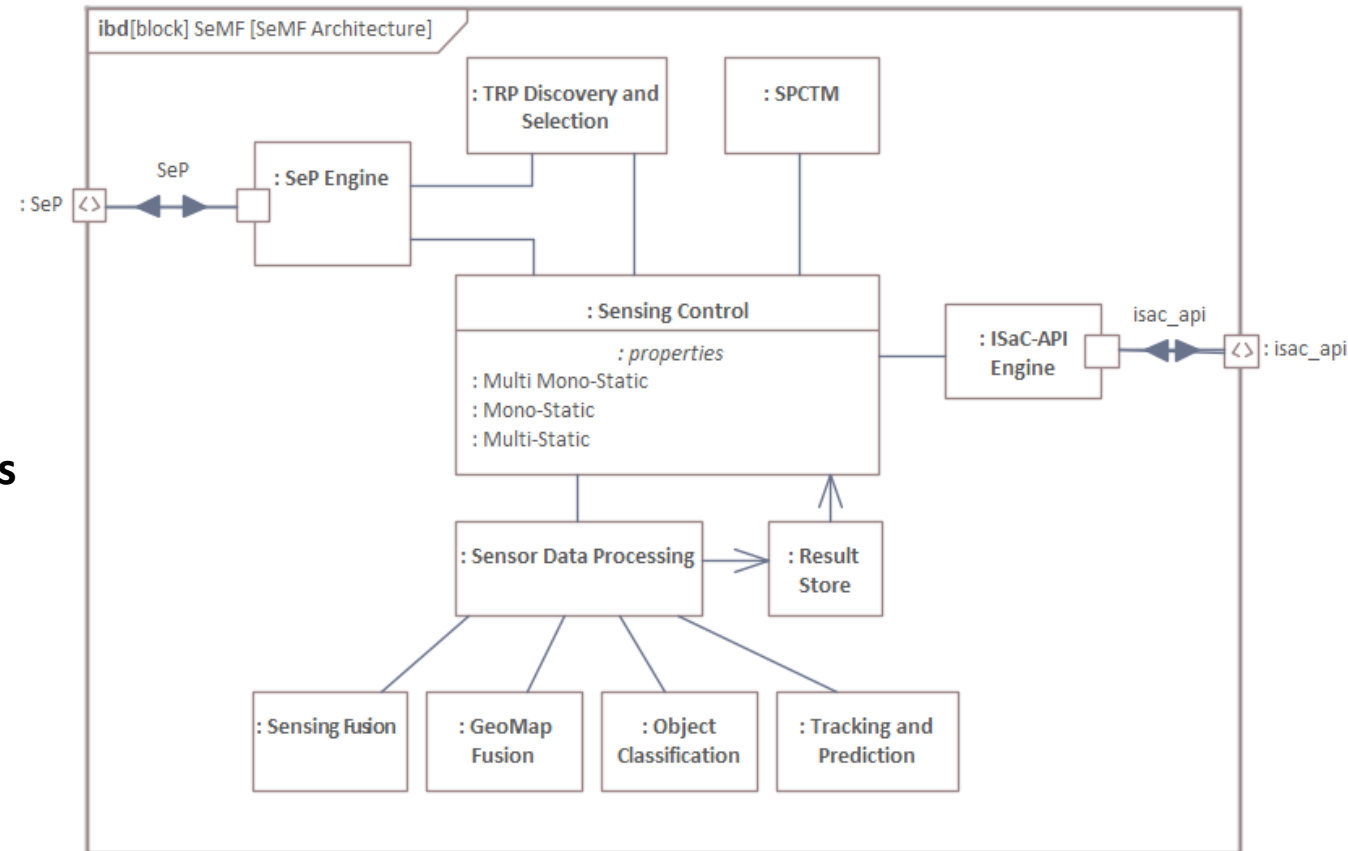

ISAC radios, same as radar?

Unfortunately, **no**

Radar optimized for sensing purposes

Classically horn, rotating antennas


Full duplex

RF designed for sensing

No frame structure (free modulation)

Transparent interfaces for perception layer

But you can't communicate 😊

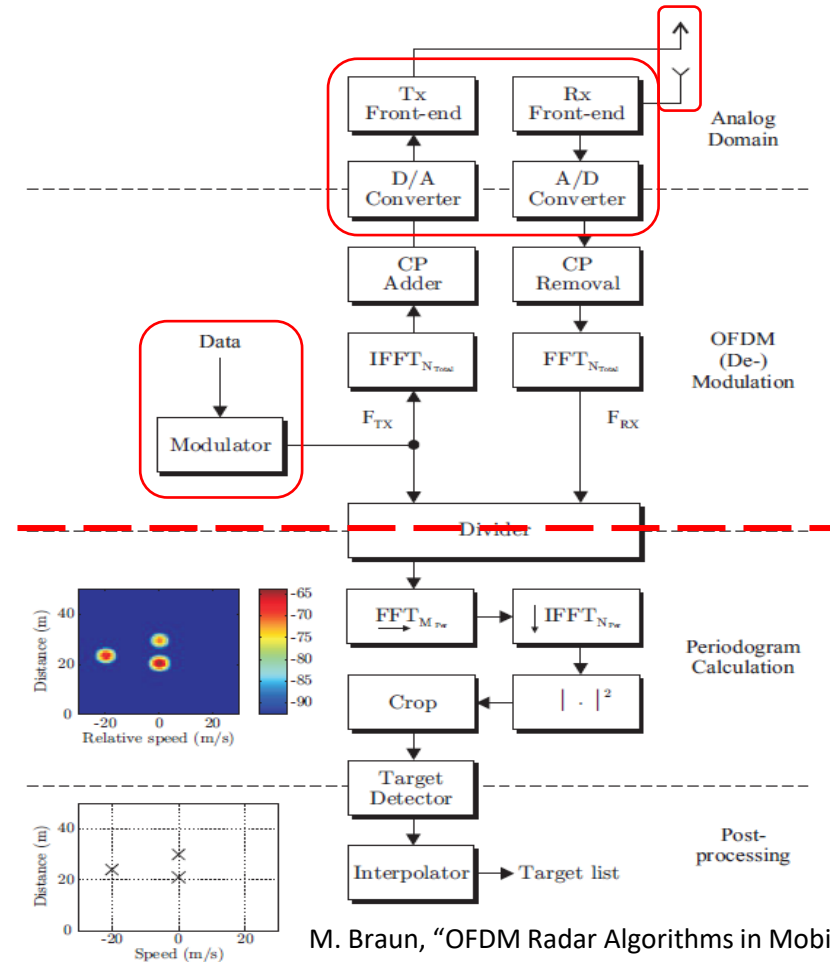

M. Braun, "OFDM Radar Algorithms in Mobile Communication Networks," PhD Thesis, KIT, 2014.

ISAC built on communications

(Analog) antenna arrays

Half duplex

Synchronization issues

RF designed for comms

3GPP frame structure


3GPP/ORAN interfaces

Researching algorithms dealing with the constraints and radio hardware to benefit both sensing and comms.



RF and L1 algorithm design efforts

Full-duplex antenna design


140GHz active integrated dielectric
lense antenna array

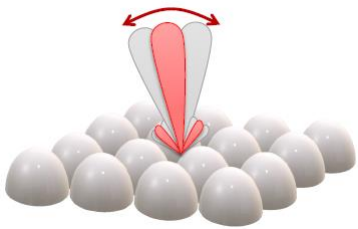


Multi-Mode Multi-Port Antennas for
high inter-port isolation

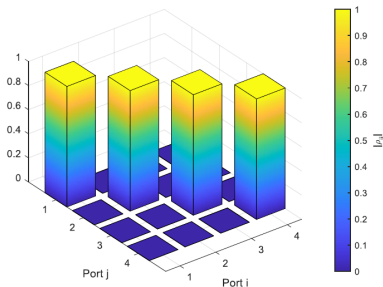

Algorithms for demonstrators

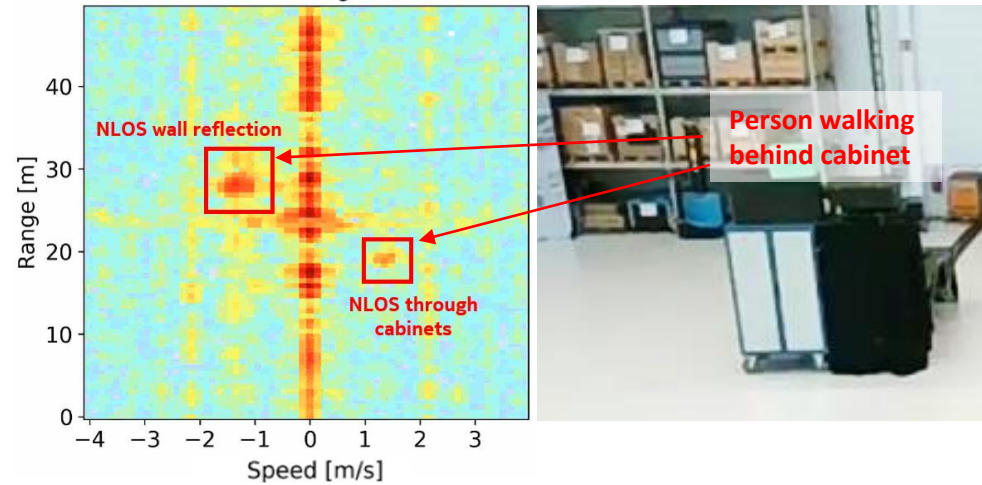


Synchronization for bistatic sensing

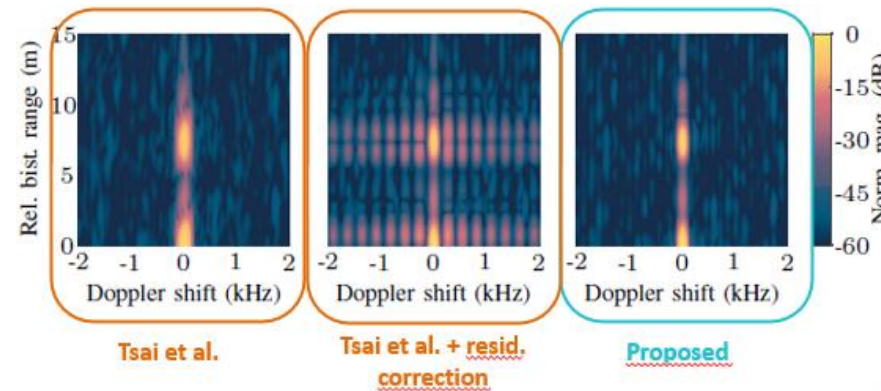


KOMSENS-6G - Enabling sensing in 6G networks

Questioning status-quo

Short pulse half duplex

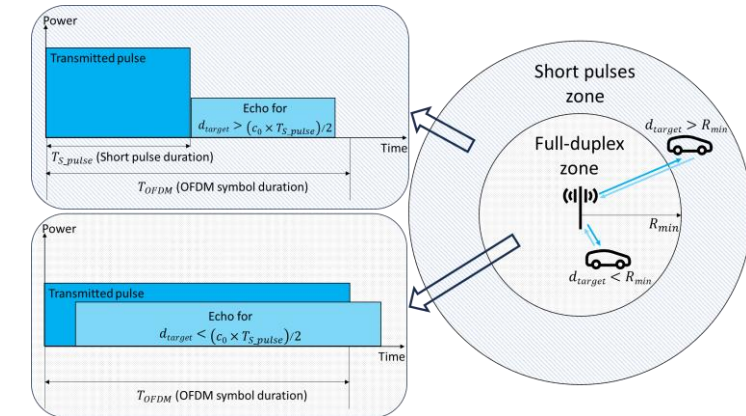


4D CNN detection & estimation

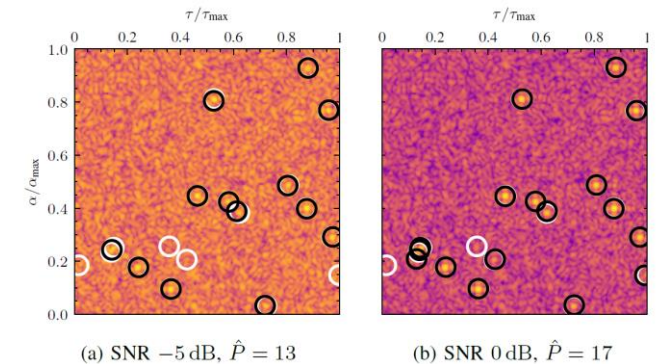


Resource allocation impact on sensing performance

- Intercell interference between sensing links, between communication links and between both link types. Sensing standalone or in DL communications slots
 - BS-BS bistatic sensing - Strong interference from surrounding BS
 - Manageable by using sensing signals that appear to victim BS like yet another radar target
- 3-BS multistatic sensing, multi-monostatic or monostatic+bistatic.
 - Same signal for sensing and communications, all BSs use same resources.
 - Minimize sensing error under comms SINR and TX power constraints
 - Coordinated orthogonal resources (CoMP-like) with range (and AoA) fusion
 - Realistic shapes and reflection parameters
- Investigating reuse of 5G NR RS
 - Non-periodic resource allocation, link level simulation
 - Resolving the ambiguities

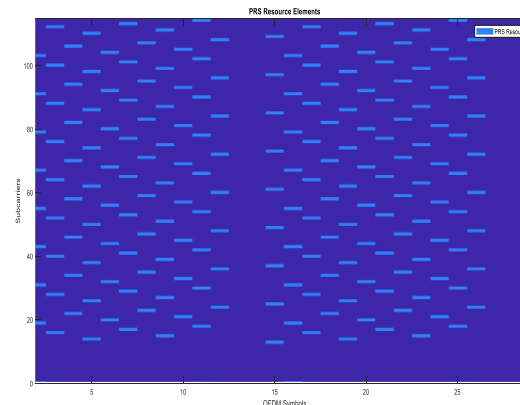

KOMSENS-6G - Enabling sensing in 6G networks

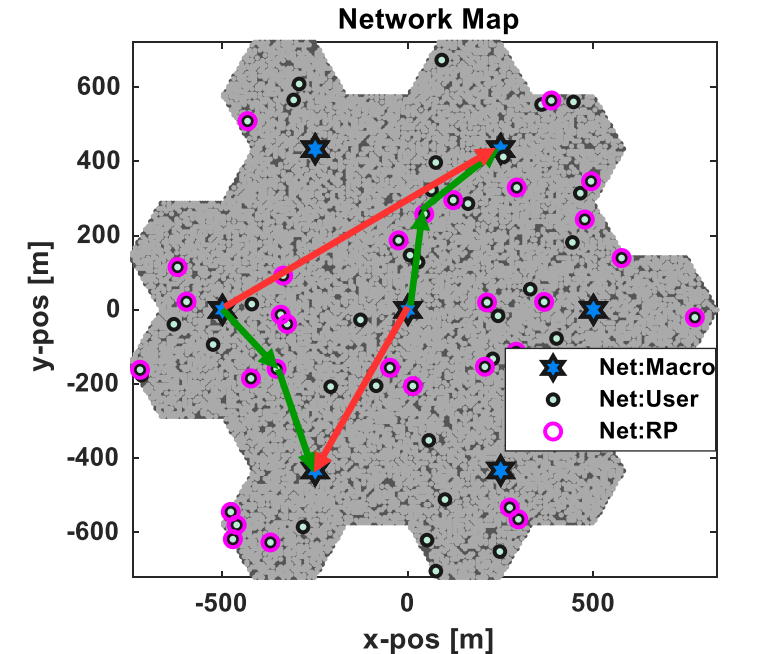

- ➔ desired sensing signals
- ➔ interfering sensing signals


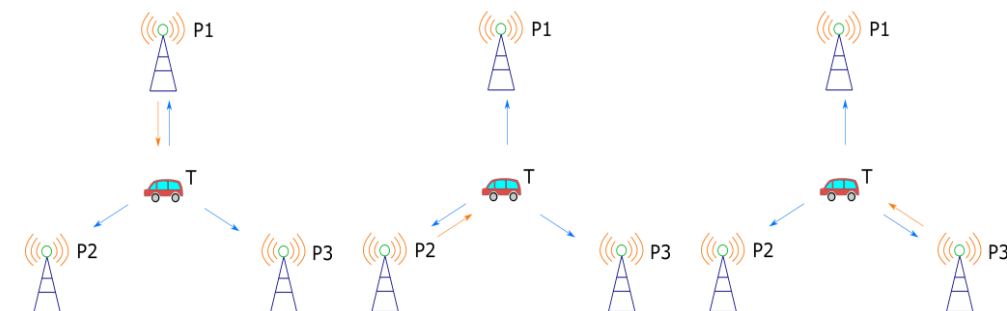



Fig. Scheduled transmissions

Protocol / QoS / Adaptivity


- Target adaptive sensing resource allocation
 - Bandwidth adapted by DRL to changing target separation.
- Age of Information based sensing scheduling.

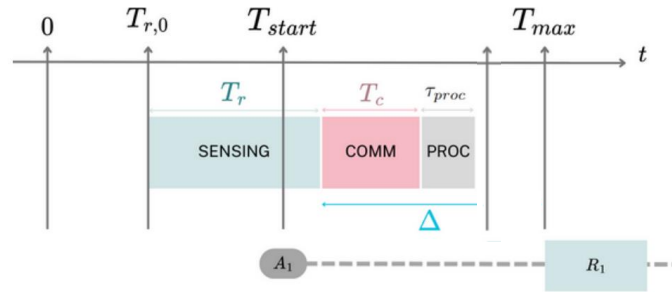

- Sensing as a Service offer by CSPs requires QoS fulfillment.
 - QoS framework based on use case specific SQL (Sensing Quality Indicator) to be introduced similar to 5QI.
 - SQLs assigned by SeMF to sensing services triggered by application functions and transferred to RAN nodes for RRM.
 - Training/calibration SQoS in real deployments, SQoS maps.

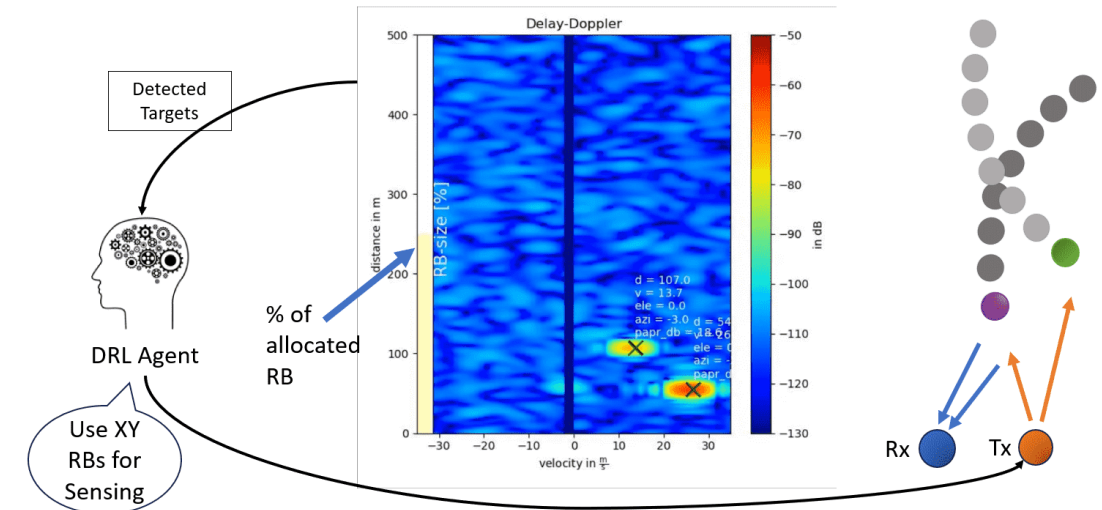


Parameters impacting the sensing quality

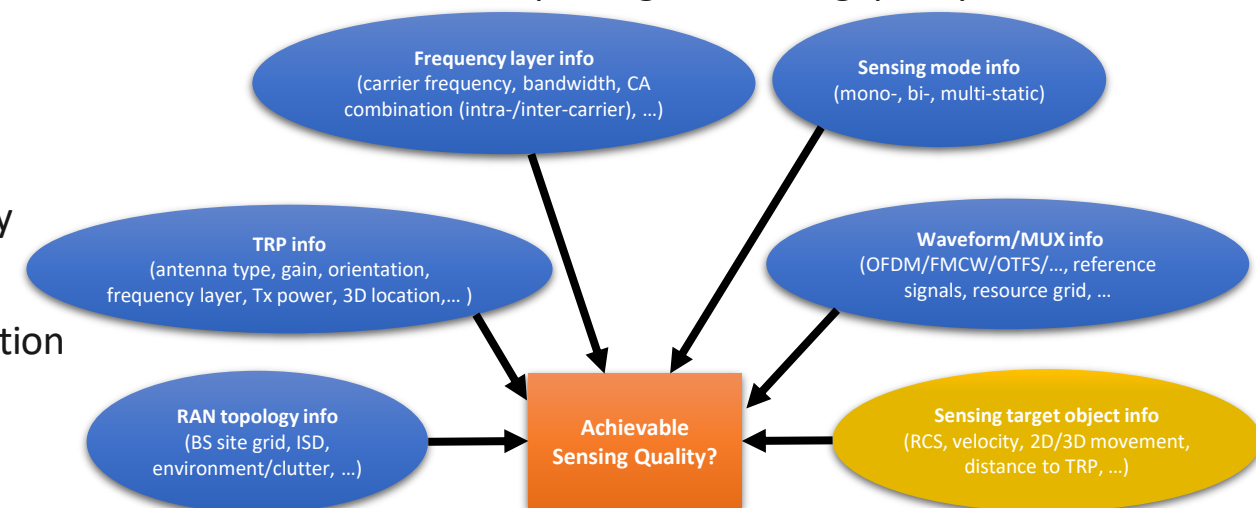


Distributed sensing and fusion approaches

Multi-monostatic sensing

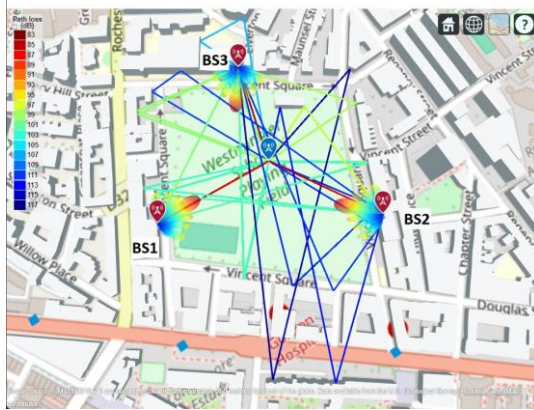

Snapshot of the MATLAB's ray tracing with three BSs and one target at Vincent Square, London


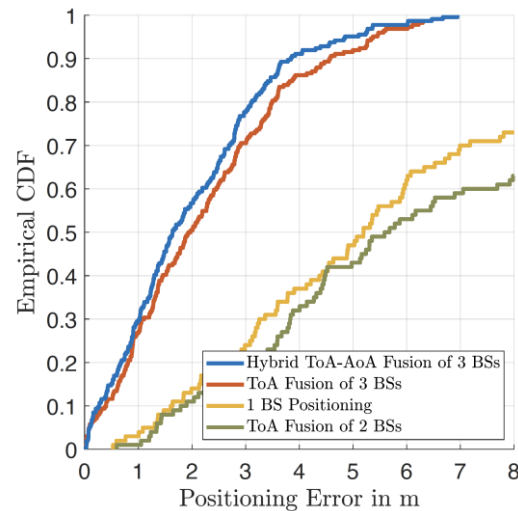


Cumulative density function of the positioning error when different fusion schemes are considered. **Multi-site fusion of estimates decreases the position error significantly**

Geo-map fusion


Improves object- identification, -classification and -localization by fusing sensing data with a 3D Geo-Model

- Point Cloud Model generated by FARO Laser Scan
- 4 Scan positions for 3D model fully illuminated
- Point Cloud imported into the CityGML-Model of the Arena2036

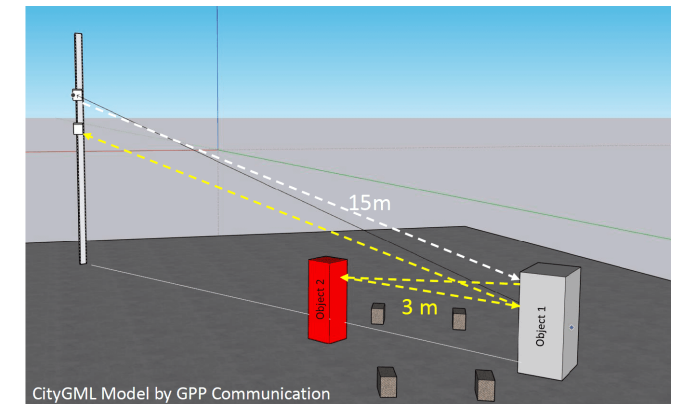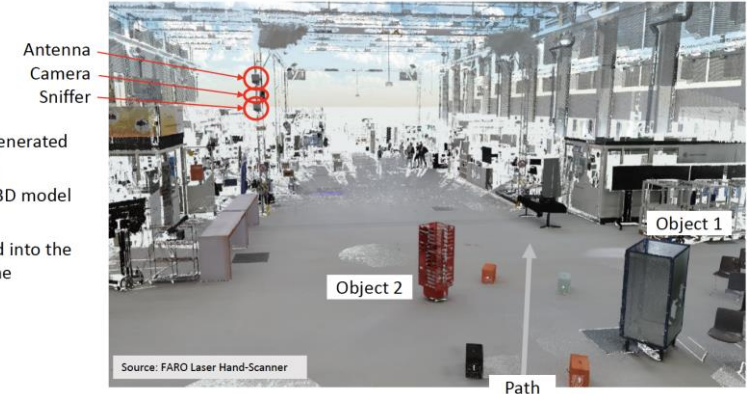


AI based approaches to parameter estimation and object detection

ML-based target detection and localization using CNNs

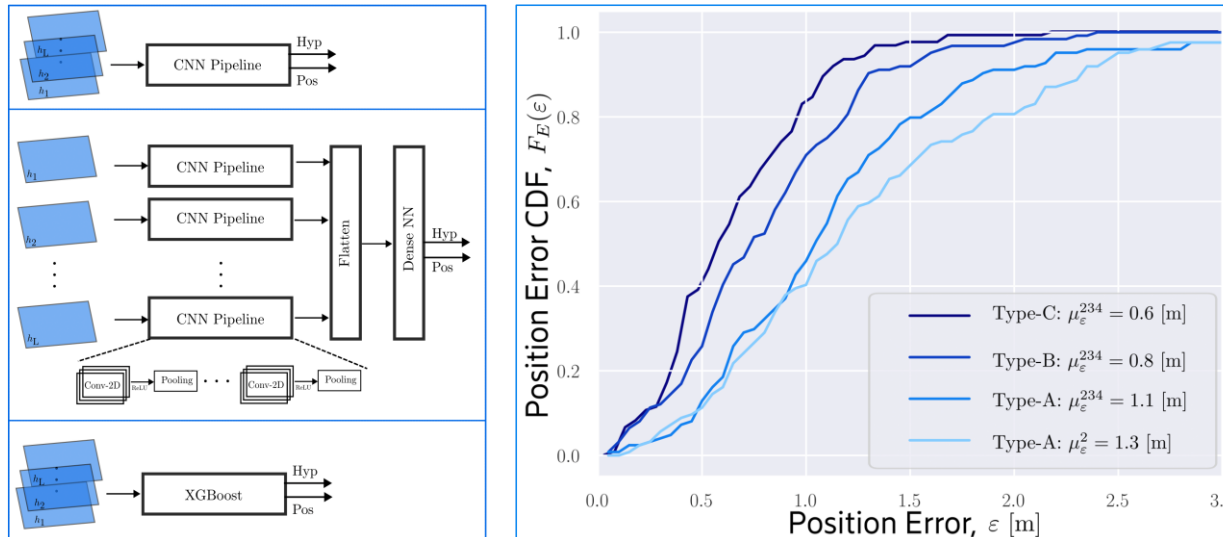


Channel charting

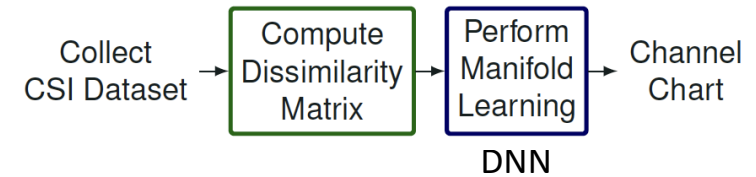



- Can be used for localizing a user moving in an indoor environment
- Channel Charting can also be useful for several RRM tasks such as SNR prediction, beam management, and others

ML-based multi-target detection

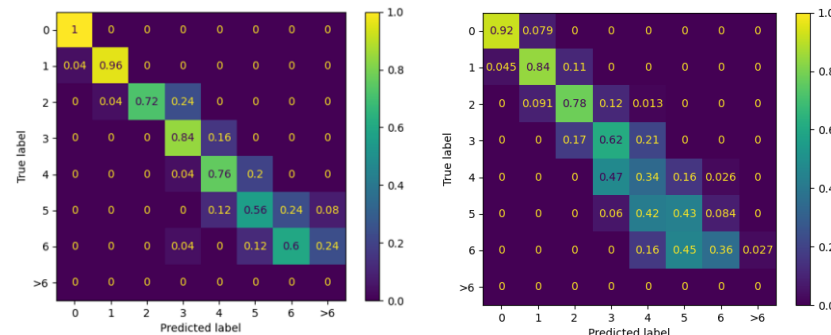

CA-CFAR

CNN

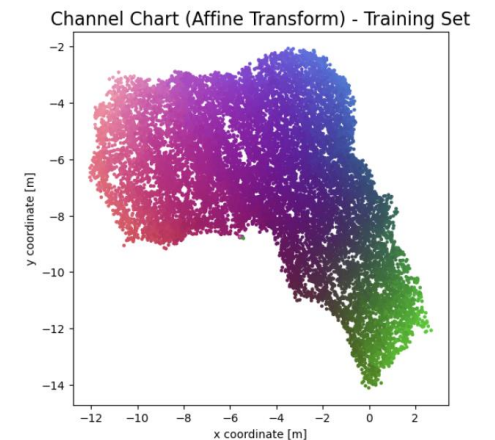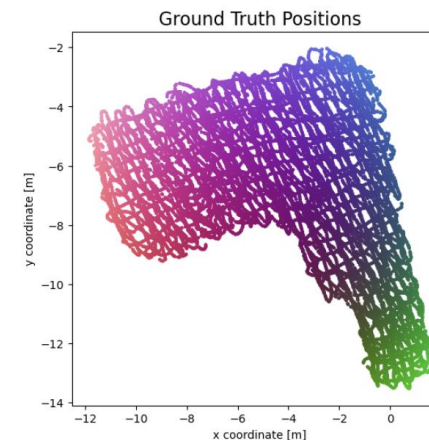


Demonstrators / Contributions

- **DICHASUS: Massive MIMO Sensing** (University of Stuttgart)
- **ISAC UAV Dataset** (Technische Universität Ilmenau)
- **GeoMap Fusion, System Modelling** (GPP)
- **Base station (gNB) based sensing setup** (Arena 2036, Bosch/Nokia/GPP)
- **Broadband Massive MIMO Testbed** (Karlsruhe Institute of Technology)
- **Sub-THz Lens Array and RF Frontend** (IMST)
- **M³PA Aperture Antenna Array** (Leibniz University Hannover)
- **Antenna evaluation and Test Platform development** (Barkhausen Institut)
- **Self-interference Cancellation** (Nokia)



KIT Live Demo with R&S at Open6GHub

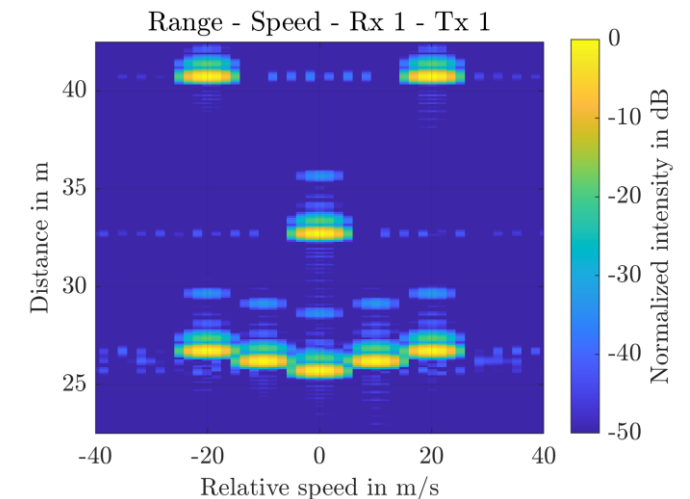


Visit our booth

13B/C (across the catering area) for

- Demonstrators, exhibits
- Digital posters
- Further details


Posters

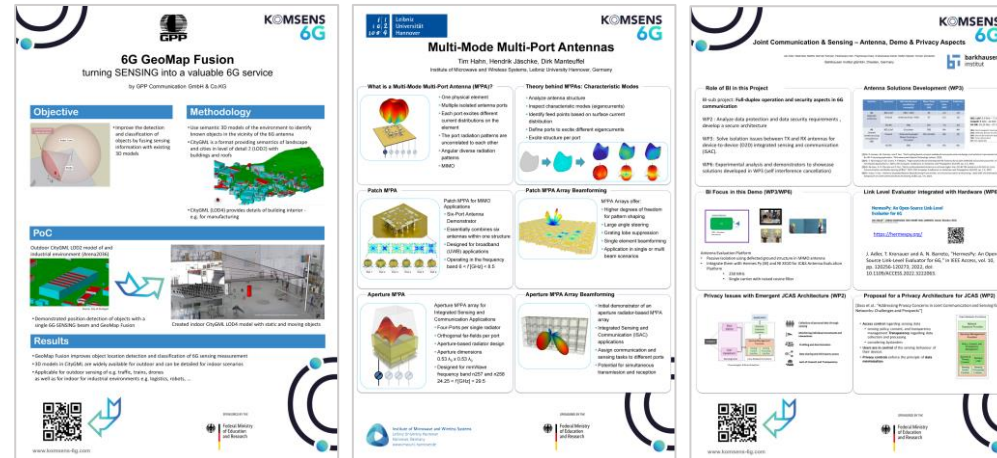


KOMSENS
6G



www.komsens-6g.com

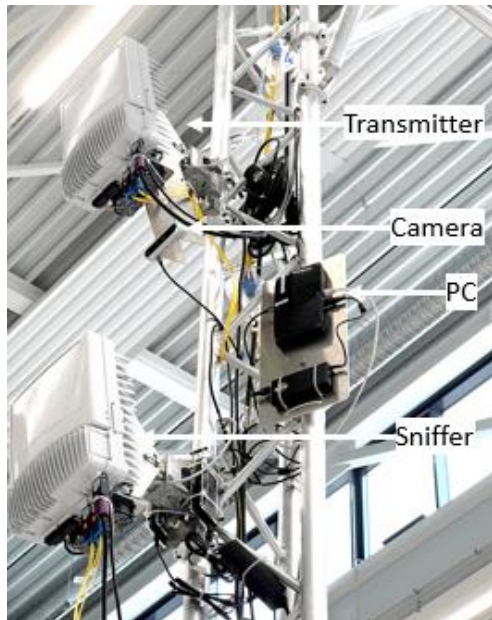


Infos

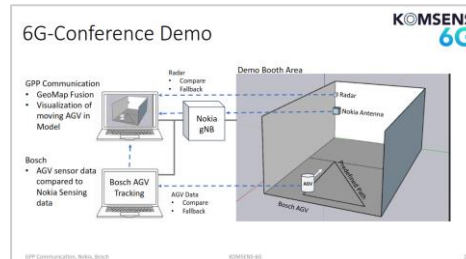

Live AGV Sensing




Multi-Mode Multi-Port Antenna Prototype

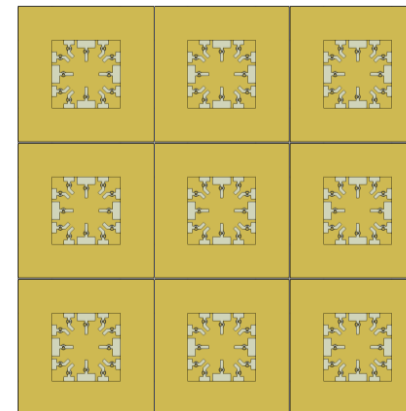

Leibniz
Universität
Hannover

Antenna Evaluation Live Demo

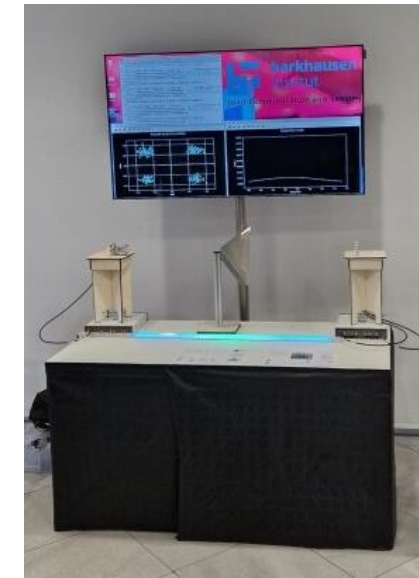

barkhausen
institut



Conclusion



- The real challenge of ISAC is not sensing, but doing sensing with communication hardware, standards and implementation architecture.
- TX-RX antenna isolation is key; array sub-division and separation is required.
- BS-BS interference is a serious challenge, appears to be manageable by using sensing signals that appear to victim BS like yet another radar target.
- Clutter suppression is a challenge in particular for detecting close to zero Doppler targets.
- Sensing as a Service offer by CSPs requires a Sensing QoS framework.
- KOMSENS-6G is on track with developing solutions for these challenges.